

MODEL 665 & 667 INSTRUCTION MANUAL ADDENDUM


ROLL CHART REPLACEMENT


The following steps should be taken to replace the roll chart:

1. Unfasten and lift out the panel assembly from the cabinet.
2. Remove the four screws which hold the roll chart bracket to the front panel.
3. When the bracket is removed, pull the ends of the bracket to release both rollers.
4. Remove the old chart and any excess tape from the rollers.
5. Fasten the bottom end of the new chart to one roller with good quality adhesive tape. The printed surface of the chart must face away from the roller.
6. Wind the chart onto the roller carefully, being certain it does not wrinkle or bind on the side wheels.
7. Place the other roller under the one on which the chart is wound so that adjacent gears mesh.
8. Pass the top end of the chart through the opening between the rollers and fasten it to the surface of the lower roller (pull the chart tight onto the lower roller before fastening).
9. With the damper spring to your left, insert the pair of rollers onto the bracket with the full roller toward the open end, which when mounted is closest to the panel. (The printing on the roll chart must be right-side up).
10. Remount the bracket to the front panel.
11. Finally, check to see that turning the wheels to roll the chart through its entire length does not cause any binding on the wheels or the chart paper. If any problem occurs refer to the diagram below.

FINAL NOTE

This addenda supersedes all previous mention of new chart installation methods including those printed in your Instruction Manual.

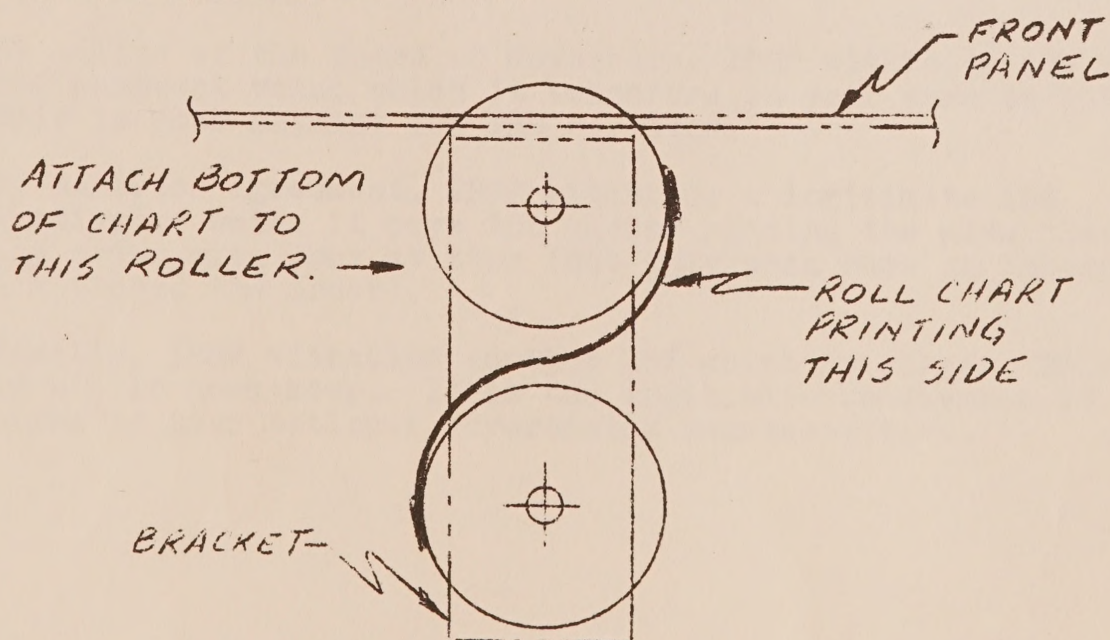

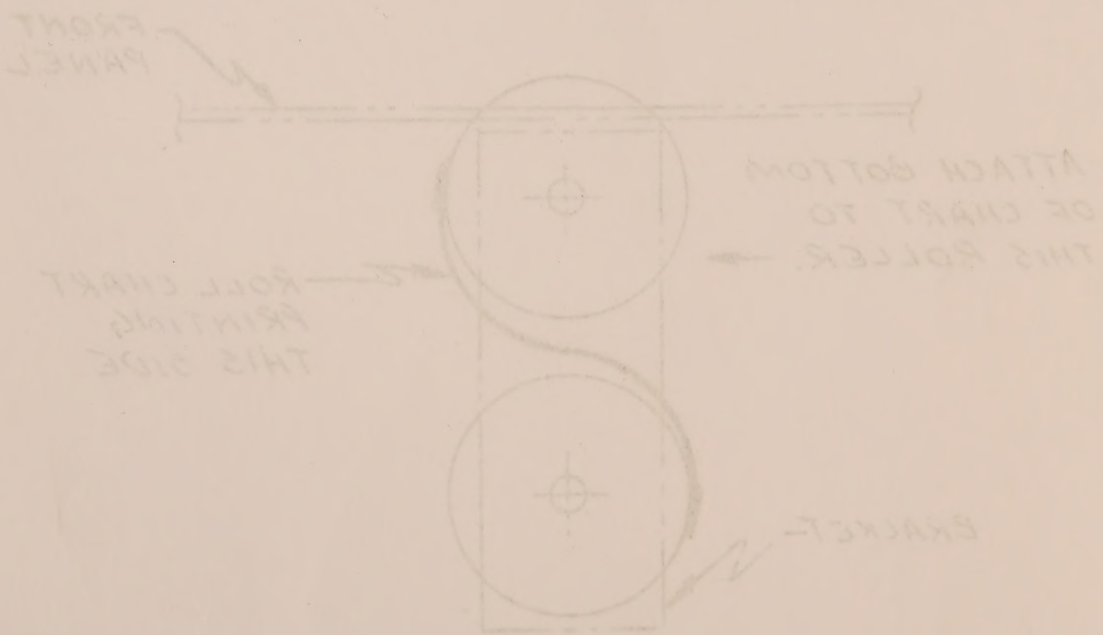

those printed in your instruction Manual.
This addenda supersedes all previous mention of new chart installation methods including

FINAL NOTE

any problem occurs refer to the diagram below.
entire length does not cause any binding on the wheels or the chart paper. If

11. Finally, check to see that turning the wheels to roll the chart through its panel. (The printing on the roll chart must be right-side up).
10. Reattach the bracket to the front panel.

9. With the damper spring to your left, insert the pair of rollers onto the bracket with the full roller toward the open end, which when mounted is closest to the before fastening).
8. Put the top end of the chart through the opening between the rollers and fasten it to the surface of the lower roller (pull the chart tight onto the lower roller).

7. Place the other roller under the one on which the chart is wound so that adjacent bind on the side wheels.
6. Wind the chart onto the roller carefully, being certain it does not wrinkle or tape. The printed surface of the chart must face away from the roller.
5. Fasten the bottom end of the new chart to one roller with good quality adhesive.

4. Remove the old chart and any excess tape from the rollers.
3. When the bracket is removed, pull the ends of the bracket to release both rollers.
2. Remove the four screws which hold the roll chart bracket to the front panel.
1. Unfasten and lift out the panel assembly from the cabinet.

The following steps should be taken to replace the roll chart:

ROLL CHART REPLACEMENT